



**PRODUCT: JK Front Hoop Light Bar Pro**

REV: A | 10-08-2020 | R55015

**READ INSTRUCTIONS IN FULL BEFORE INSTALLATION.  
QUESTIONS? CALL 916-760-4575 M-F 7:00 AM – 5:00 PM PST**

The ARS experience includes the ease of installation of our products. We design for most contingencies, but installation may be different based on different Jeep condition, configuration and/or year.

We are continually trying to improve our products and instructions – please help us by providing feedback and pictures if you find any part of the instructions that do not match your Jeep or are not easily understandable.

If you have any difficulties at all, please give us a call. Thank you and enjoy your ARS Products!

**IMPORTANT NOTE: We use Stainless Steel Hardware where possible. Therefore, a tube of Silver Anti-seize is provided and should be used on all bolts—only a small amount is needed.**

---

**WARRANTY INFORMATION:** This article is sold without warranty expressed or implied. No warranty or representation is made as to this products ability to protect the user from injury or death. The user assumes that risk. The effectiveness, warranty and longevity of this equipment are directly related to the way it is INSTALLED, USED and/or MAINTAINED. THE USER ASSUMES ALL RISK. By purchasing this product and opening the packaging, purchasers expressly acknowledge, understand and agree that they take, select and purchase these ARS products from Armored Works, LLC, its affiliates and distributors and agents as is and with all faults. The entire risk as to the quality and performance of these ARS products is with the purchaser. Working on your vehicle can be a dangerous activity. If you are unsure of what you are doing, please leave mechanical or safety critical work to a skilled mechanic. We take no responsibility for the incorrect use and/or installation of ARS products.

## Section 1: Tools & Notes on Installation



**Tools Required:** This list is the recommended tools for ease of installation. Other versions of the same tool can be used. For example, Allen Wrenches instead of Allen Drive Sockets.



Socket & Ratchet Wrench

3/16" Allen Socket



T40 Torx Socket

**HOW TO USE THIS GUIDE:** The installation guide contains ALL steps for installation. Please read and follow the instructions in order of each page top to bottom and left to right.

**Jeep Model:** Instructions may apply to multiple Jeep models but are labeled separately where appropriate (i.e. TJ vs. LJ).

**Options:** Because of the number of component options we offer, these instructions may contain steps that will not match your configuration. You can skip these steps.

**Images:** Pictures are provided, and parts are labeled throughout the instructions. Each text box contains guidance based on the pictures next to it. The text will refer to alphabetical labels (A, B, etc.) found in the images.

**Installation Notes:** Terms may be used in the body of the instructions that you may not be familiar with, if you have any questions feel free to contact us at the number below, or email [techhelp@metalcloak.com](mailto:techhelp@metalcloak.com)

**QUESTIONS:** Any questions or comments about the instructions? Call us at 916-760-4575 M-F 7:00 AM – 5:00 PM PST.

# Section 2: Product Components



DC-0001 REV A

SHEET 1 OF 1

ITEM	PART NUMBER/DESCRIPTION	QTY.
1	55015-10-003	2
2	55015-00-001-R1	10
3	91190A550	10
4	91239A438	10
5	91455A440	10
6	WM-7008 WELDMENT, PRO FRONT HOOP, JK	1

DETAIL A  
SCALE 1 : 3

THE INFORMATION CONTAINED ON THIS DRAWING IS THE EXCLUSIVE PROPERTY OF ARMORED WORKS, LLC. UNAUTHORIZED REPRODUCTION IS PROHIBITED.

**DO NOT SCALE DRAWING**

**PART NUMBER/DESCRIPTION**


R55015 PRO FRONT HOOP LIGHT BAR, JK

## Section 3: Installation Instructions



### Step 1: Preparation For Front Hoop Installation

- A. Insert the tube caps into the bottom of the tube on the front hoop.
- B. Using a T40 torx wrench remove the top three bolts and the front two bolts located on the A-pillars.
- C. Insert the nylon washer into the 5 bolt holes from Step B located on the A-pillar.

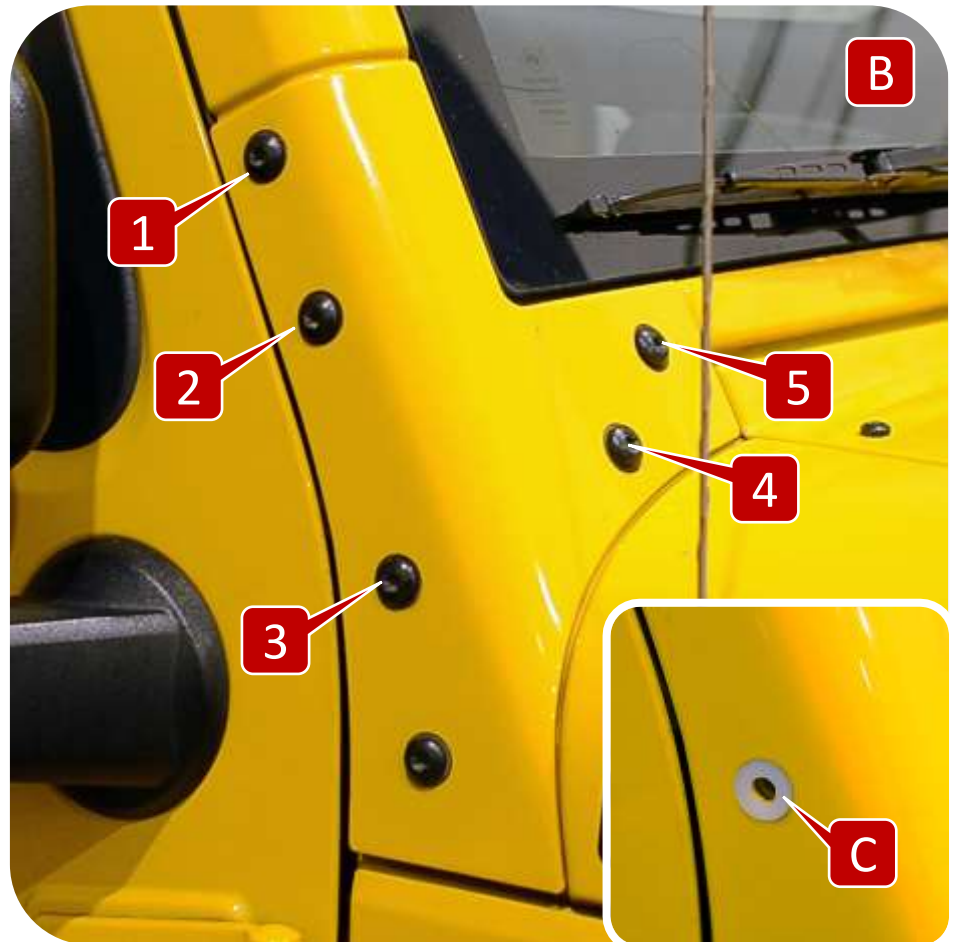

## Section 3: Installation Instructions



### Step 2: Front Hoop Installation

- D. With the help from another person align the front hoop bolt holes to the holes located on the A-pillar.
- E. Using the provided flat washers, split washers and button head bolts install the front hoop to the A-pillar hand tight.
- F. Using a 3/16" socket wrench tighten all hardware.



**Important Note:** *If issues arise with aligning the front hoop to the A-pillar factory holes, we recommend to snug either the side or the front bolts first, this allows the other holes to line up where previously mis-aligned.*

